





1

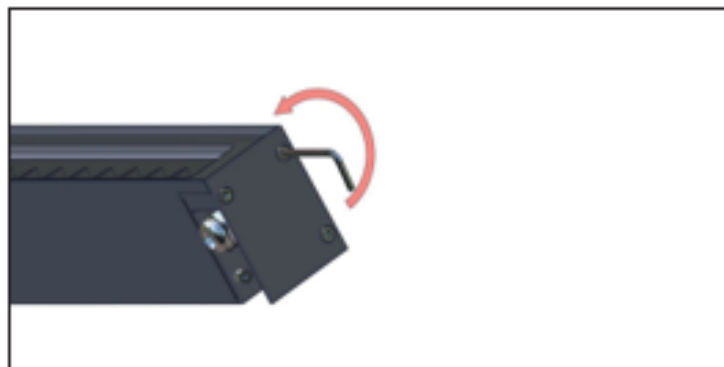


2

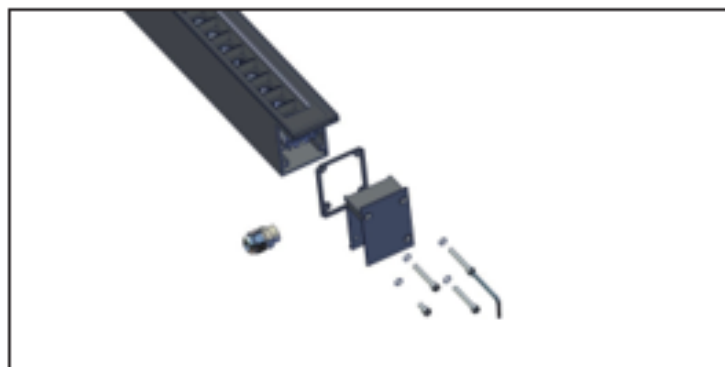

3




4

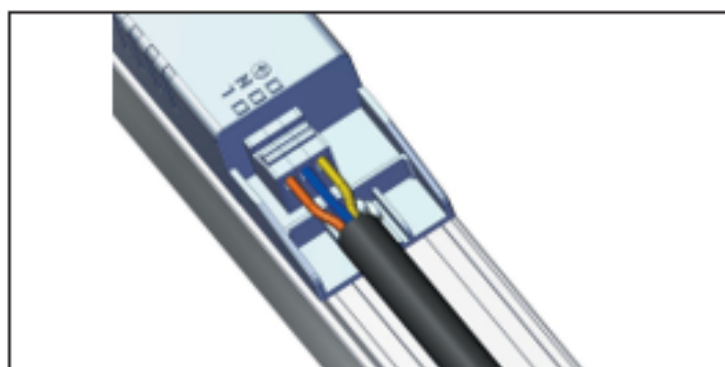

5



6

IP65 Stagno contro la polvere / Protezione contro i getti d'acqua Dust-tight / Jet-proof	 Installazione a parete Wall mounting	CE CL I IK 09	 Sostituire gli schermi di protezione danneggiati con ricambi originali Replace any cracked protective shield with original parts
---	---	------------------------------------	--

IT Leggere attentamente e seguire scrupolosamente prima e durante l'installazione dell'apparecchio le seguenti istruzioni che vanno poi conservate, in quanto contengono informazioni importanti per la sicurezza dell'apparecchio. **Importante;**

- L'apparecchio deve essere installato da persone qualificate in accordo alle normative vigenti relative agli impianti elettrici.
- Prima di qualsiasi operazione togliere sempre la tensione.
- Effettuare periodicamente (almeno una volta all'anno) la manutenzione dell'apparecchio verificando le condizioni di tutti i componenti e sostituire quelli non in buono stato.
- E' obbligatorio che l'impianto elettrico preveda un dispositivo di protezione tipo interruttore magnetotermico con protezione differenziale < 30 mA e che periodicamente venga verificata la sua efficienza.
- Non installare in caso di pioggia o umidità
- * E' responsabilità dell'installatore la scelta dei sistemi di fissaggio in funzione del tipo e della consistenza della superficie di supporto.
- Il costruttore declina ogni responsabilità per l'inosservanza di queste regole.

GB Please read carefully before and follow the instructions step by step during installation of appliance and keep them for further reference.

Important;

- This luminaire must be installed by a qualified electrician according to the relevant standard and to the regulation of the electrical systems.
- Disconnect main power supply before installation and maintenance.
- Please ensure this product is serviced regularly by maintaining and verifying the condition of all the components and replace the ones that are not in good condition (check at least once a year).
- It is compulsory that the electrical system is provided with a residual current operated circuit breaker safety device < 30 mA and whose efficiency must be verified regularly.
- Do not install in case of rain or humid weather condition
- ** The choice of the suitable fixing means to the supporting surface is under installer responsibility.
- The manufacturer declines any responsibility if these instructions won't be observed.

lamdalux



7



8



9



10



11



12



13




14



15



16

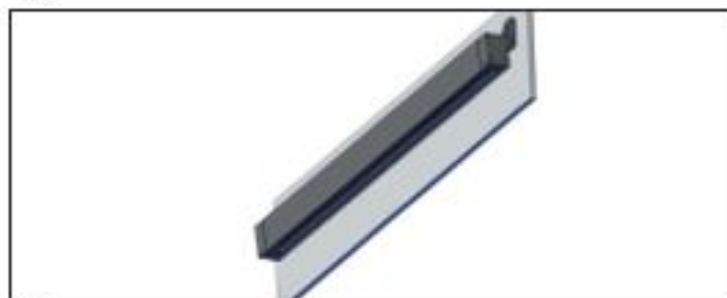

17