

Radium

Technical information

DRIVER 30W/700mA IP20

Constant current LED driver for LED modules with an operating current of 700mA and an output voltage between 33V and 42V.

For protection class I and protection class II luminaires.

Flicker free with high efficiency and long service life of 70,000h @T_c 69°C.


For AC operation at 230V 50-60Hz or DC operation at 200-280V DC.



Recommended for the following Radium LED T8 Neo:

- 43719850 LED T8 NEO 36 840/G13
- 43719851 LED T8 NEO 36 865/G13

Drawing

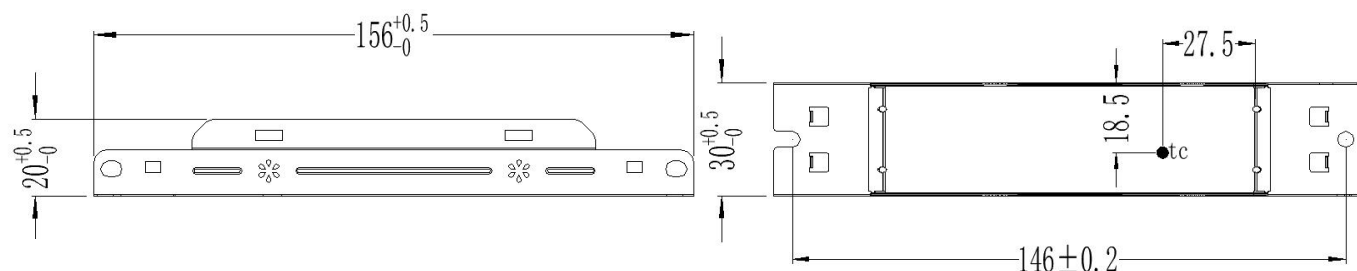

Technical Daten

General data

Code	DRIVER 30W/700mA IP20
Article No.	OTNA4034
EAN10	4003556010864
EAN40	4003556410862
Weight [g]	140 g
Length [mm]	195 mm
Width [mm]	30 mm
Height [mm]	20 mm
Service Life @T _c 74°C	50,000 h
Service Life @T _c 69°C	70,000 h
Service Life @T _c 64°C	100,000 h
Guarantee	5 years

Operating conditions

Permissible ambient temperature T _a [°C]	-30°C...+50°C
Permissible storage temperature [°C]	-30°C...+80°C
Permissible T _c temperature [°C]	-30°C...+74°C
Max. permissible T _c temperature [°C]	+74°C
Permissible air moisture	10-90%RH
Degree of protection (IP)	IP20
Protection class	I

Electrical Parameter Output

Rated power [W]	23,1 – 29,4 W
Permissible voltage [V DC]	33 – 42 V
Output current [mA]	700 mA
Output current tolerance [mA]	± 5 %
Output P _{ST_LM}	≤ 1

Radium Lampenwerk GmbH
P.O. Box 1440 - 51678 Wipperfürth

☎ +49-2267 - 81 - 1
FAX +49-2267 - 81 - 231

Information no. 9905-01-2112

Validity: The technical information sheets (TI sheets) are updated at irregular intervals! The user is responsible for the validity and up-to-dateness of this TI sheet. With the publication of this TI sheet, all previous editions for this lamp type lose their validity

Radium

Technical information

Output SVM	≤ 0,4
Offset time @AC 230V	<0,5 s
Kind of protection embodied	Short-circuit proof, open-circuit-proof

Electrical Parameter Input


Mains voltage range [V AC]	220 – 240 V
Alternating voltage range [V AC]	200 – 264 V
Direct voltage range [V DC]	200 – 280 V
Mains frequency [Hz]	50 – 60 Hz
Nominal current [A]	0.2 A
Mains power factor [λ]	≥0.9 @230 V _{ac}
THD	≤20 %
Efficiency	≥87 %
Inrush current	≤30A & 200μs @ 230 V _{ac}
Power consumption in Stand-by	≤0.5 W
Surge voltage strength L-N	1 kV
Surge voltage strength L/N-PG	2 kV

Safety and electromagnetic compatibility


Certificates	ENEC, CE
Safety standards	EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62384:2016/A1:2009, EN61347-2-13:2014/A1:2017, EN61347-1:2015, EN62493:2015 IEC 61347-1:2015, IEC61347-2-3:2014, IEC61347-2-13:2014/AMD1:2016
EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3
EMS	CE-EMC/RCM: EN61000-4-2,3,4,5 (L-N:1KV L/N-PG:2KV),6,11
RoHS	RoHS 2.0 (EU) 2015/863

Electrotechnical Parameter


Mains power factor λ

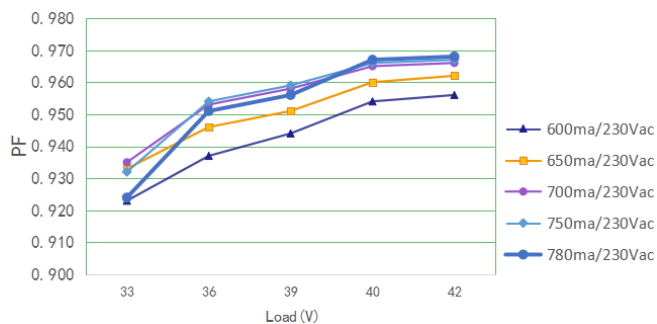

Efficiency

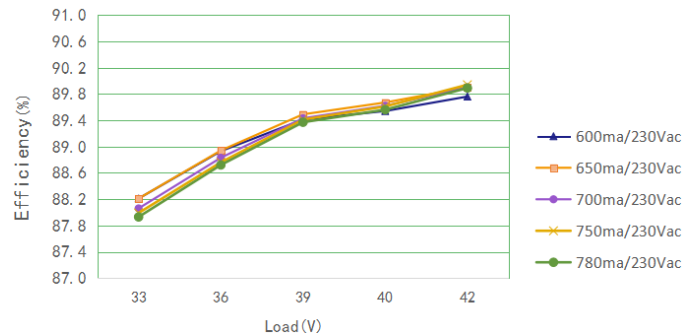

Service life

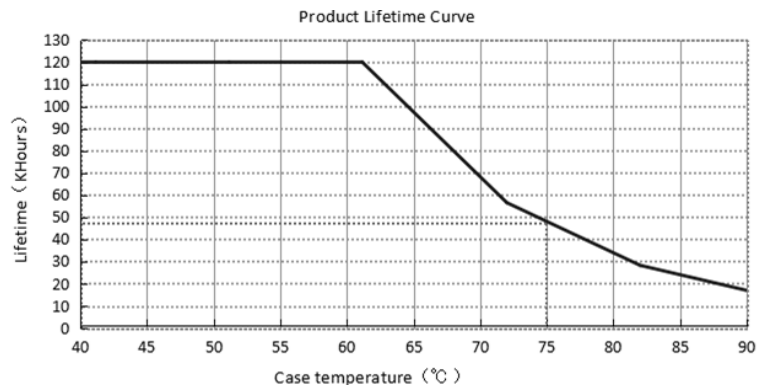

Radium Lampenwerk GmbH
P.O. Box 1440 - 51678 Wipperfurth

☎ +49-2267 - 81 - 1
FAX +49-2267 - 81 - 231


Information no. 9905-01-2112

Validity: The technical information sheets (TI sheets) are updated at irregular intervals! The user is responsible for the validity and up-to-dateness of this TI sheet. With the publication of this TI sheet, all previous editions for this lamp type lose their validity


Radium

Technical information

Wiring diagram

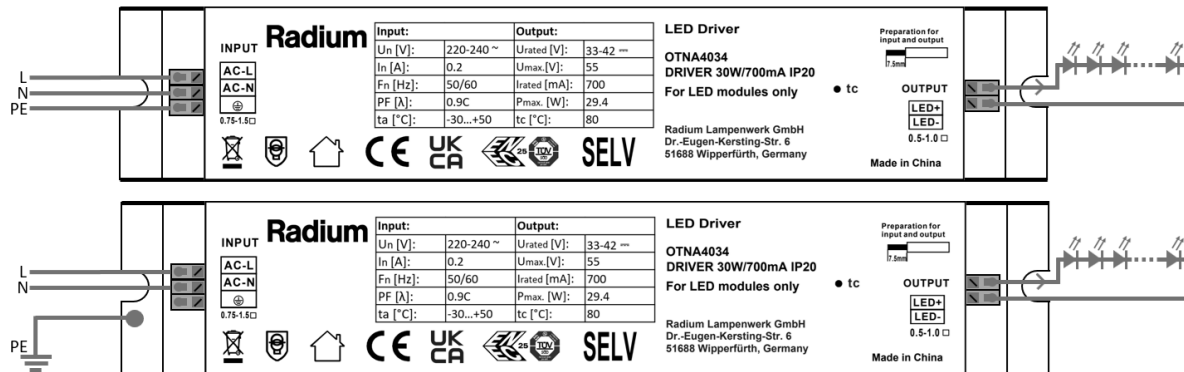

Fuse rating

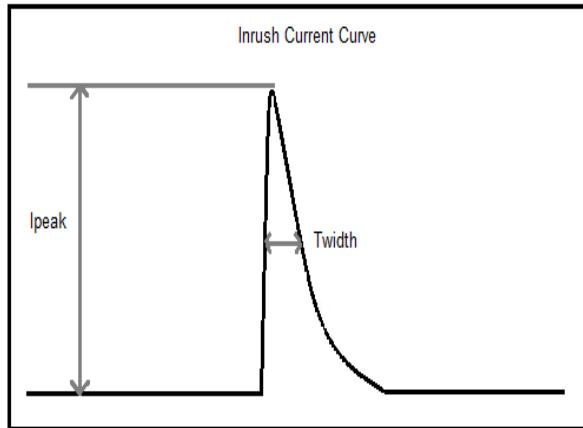

Characteristic	Current	Max. no. of devices
B	10A	13
	16A	20
C	10A	21
	16A	35
Ipeak / Twidth	≤30A / 200uS	

Notes

- It is recommended to install overvoltage and undervoltage protection devices and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity.
- As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant.
- Unless otherwise stated, the parameters of the power factor, harmonics and efficiency were test results under the conditions ambient temperature of 25°C, humidity of 50%, input voltage of 230V_{ac} (50Hz) and full load.
- Use this product according to the specifications. Otherwise there may be malfunction.
- Use of light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Radium Lampenwerk GmbH
P.O. Box 1440 - 51678 Wipperfurth

+49-2267 - 81 - 1
FAX +49-2267 - 81 - 231

Information no. 9905-01-2112

Validity: The technical information sheets (TI sheets) are updated at irregular intervals! The user is responsible for the validity and up-to-dateness of this TI sheet. With the publication of this TI sheet, all previous editions for this lamp type lose their validity