


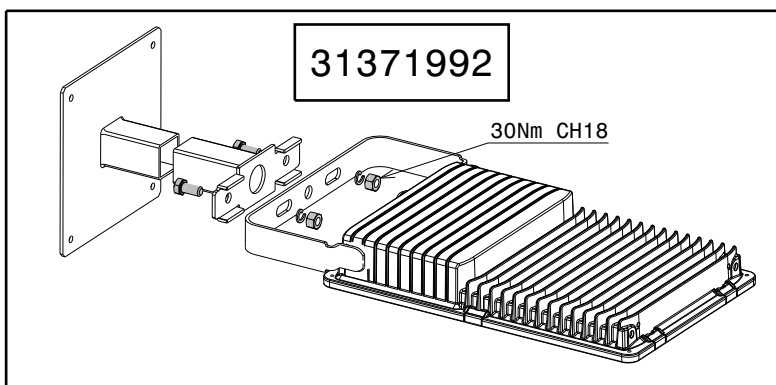
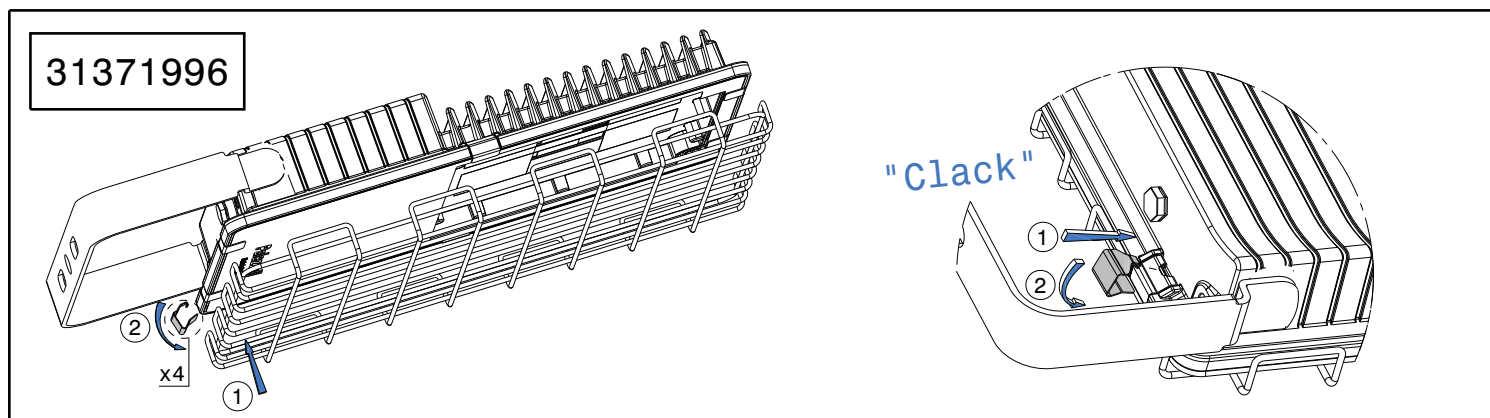

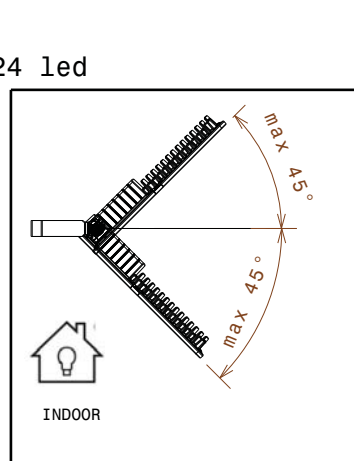
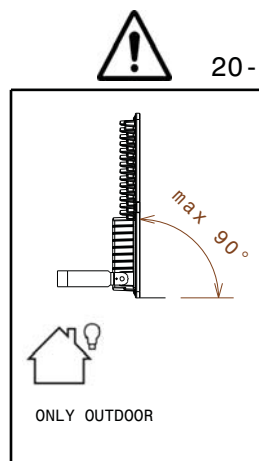
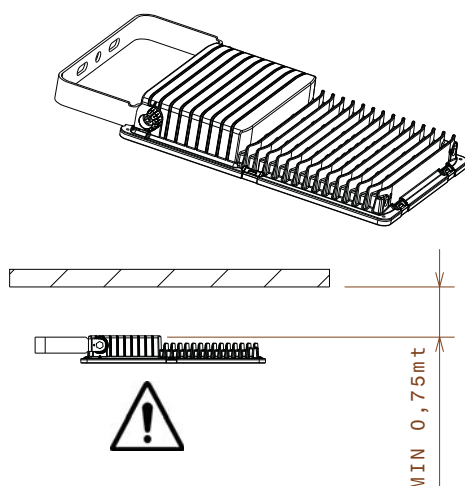
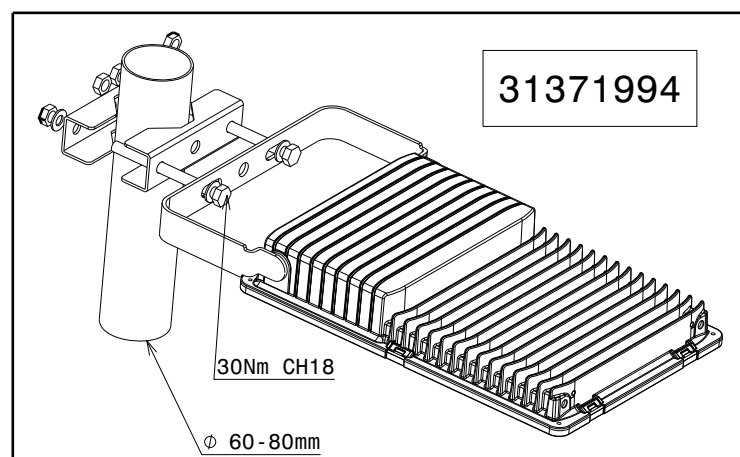
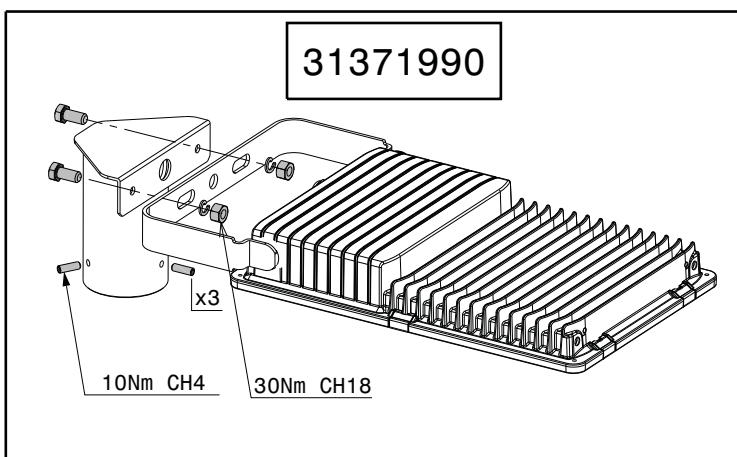




- Attenzione! La sicurezza del prodotto è garantita solo con l'osservanza delle seguenti istruzioni, pertanto è necessario conservarle.
- Attenzione! Prima di eseguire le connessioni di rete e durante la manutenzione, assicurarsi di aver tolto tensione.
- Attenzione! La sorgente luminosa contenuta in questo apparecchio deve essere sostituita solo dal costruttore o dal suo servizio di assistenza o da personale altrettanto qualificato.
- Presenza di alta tensione nell'apparecchio.
- Apparecchio non idoneo al funzionamento in cascata.
- Eseguire pulizia periodica del prodotto per garantire le migliori prestazioni termiche ed illuminotecniche.
- Pulire con un panno umido o con alcool.
- Per le versioni 1-10V/DALI utilizzare dispositivi di regolazione con isolamento almeno principale verso la rete
- Warning! The product safety is guaranteed only if the following instructions are respected, thus it is necessary to keep them.
- Warning! Before the wiring and maintenance operations, be sure the power is off.
- Warning! The lighting source contained inside this lighting fixture must be replaced only by the Manufacturer or the Assistance Service or highly skilled personnel.
- Presence of high voltage inside the device.
- The device is not suitable for loop-in / loop-out.
- Clean the product periodically to guarantee the best thermal and lighting performances.
- Clean with a wet cloth or alcohol.
- For version 1-10V/DALI use dimming device with at least basic isolation to the mains.



CONNECTOR IP TYPE1

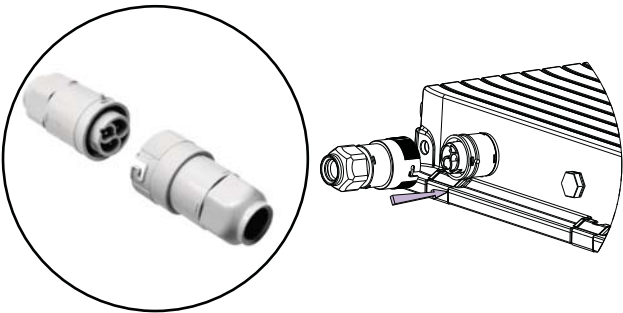



D	7mm - 13mm
X	22mm
Y	8mm
Z	30mm
SEZ	max 1,5mm ²

(A) 5 PIN POWER SOCKET/PLUG FLOODLIGHT


3	Dim- / DALI
N	Neutral
1	Line
2	Dim+ / DALI

(B) 2/3 PIN POWER SOCKET/PLUG FLOODLIGHT





CONNECTOR IP TYPE2

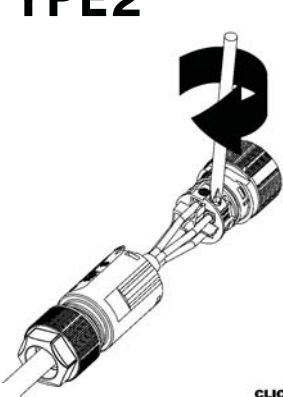

CLOSE


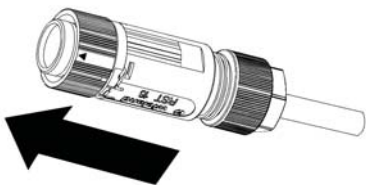


OPEN



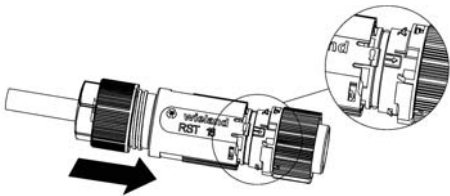
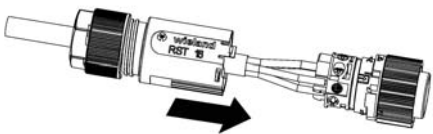


	PE	N,1,2,3
X	8mm	8mm
Y	33mm	25mm

Sezione conduttore 0,25 - 1,5 mm²
Rated cross-section 0,25 - 1,5 mm²

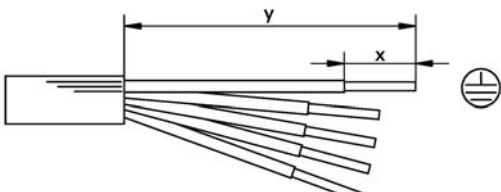


3	Dim- / DALI
4	Neutral
1	Line
2	Dim+ / DALI

				V	P.F.	IP	IK	EN 62471		
	6,5kg	0,03mq	0,13mq	220-240V 50/60Hz	$\geq 0,95$	IP66	IK08 (*)	Risk exempt		







-30°C

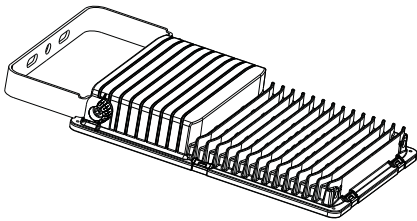

Ta max (°C)	No. LED	Iled (mA)	Pmax (W)	Iac (A)
+40	4	200	11	0,05
		700	36	0,17
	8	200	22	0,11
		700	69	0,32
	12	200	30	0,14
		700	103	0,48
	16	200	40	0,2
		700	136	0,62
	20	200	49	0,25
		650	155	0,72
	24	200	58	0,29
		650	185	0,86
+55	4	200	11	0,05
		700	36	0,17
	8	200	22	0,11
		700	69	0,32
	12	200	30	0,14
		500	74	0,34
	16	200	40	0,2
		500	96	0,44
	20	200	49	0,25
		470	112	0,53
	24	200	58	0,29
		470	133	0,63

* ESCLUSO CONNETTORE
CONNECTOR EXCLUDED

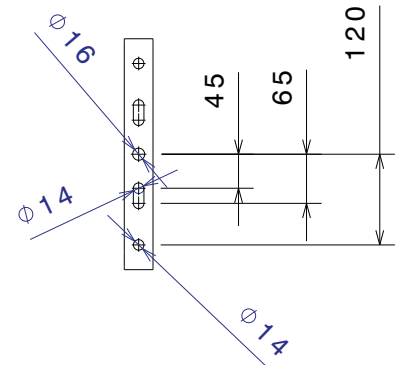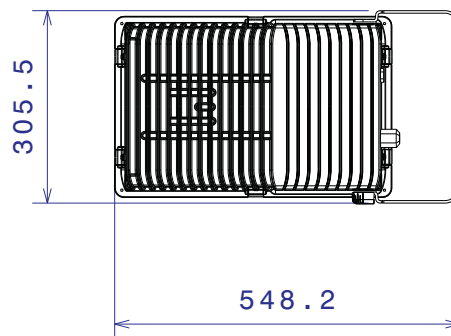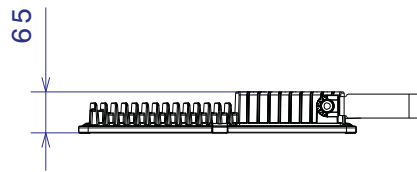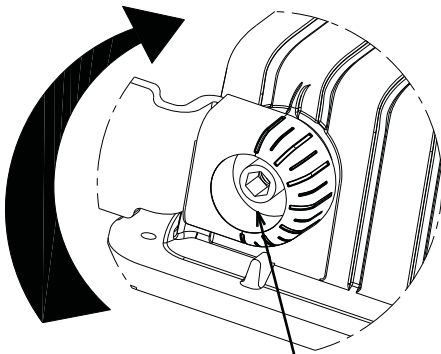

40Nm CH8