

OFF

Always mount accessories on position OFF

Installez toujours les accessoires en position OFF

Montar siempre los accesorios en posición OFF

Warning for all sizes
Consider this when installing vertical

Advertencia para todos los tamaños
Considerar cuando se instale en vertical




Avertissement pour toutes les tailles
Considérer lors de l'installation verticale

OK NOK


Tightening torque on fixing points (M'): Couple de serrage aux points de fixation (M'): Par de apriete en los puntos de fijación (M'):

Terminal Connection
Conexión Bornes
Connexion de Bornes


	$M' +5\% -10\%$
M8	Nxm 10

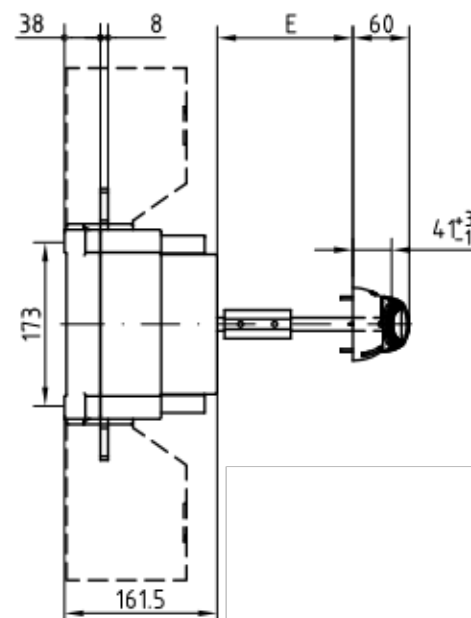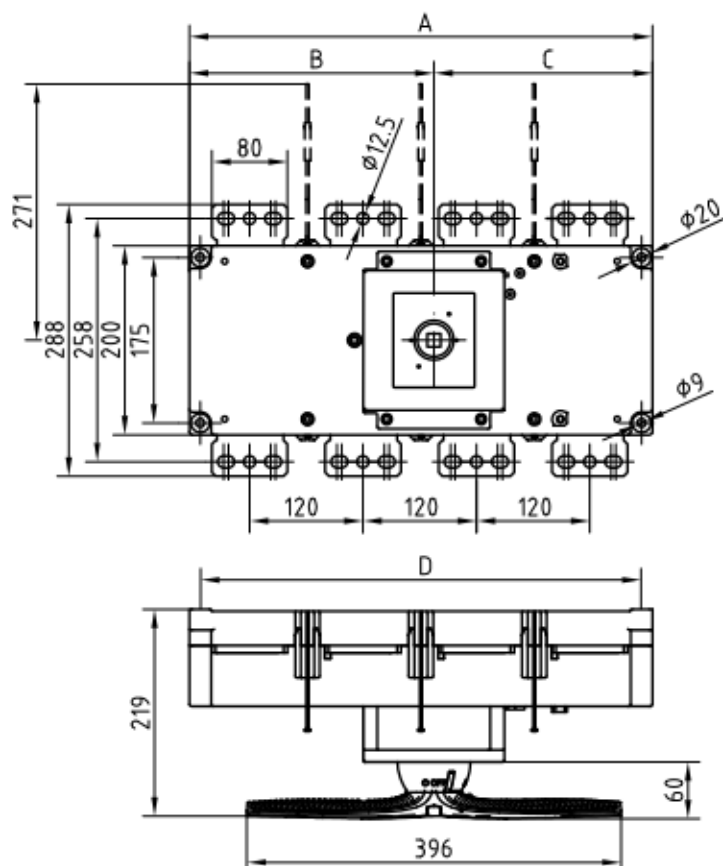

	A	B	C	D	E min.	E max.
3P+N	490	259	231	467	95	260
3P	370	139		347		

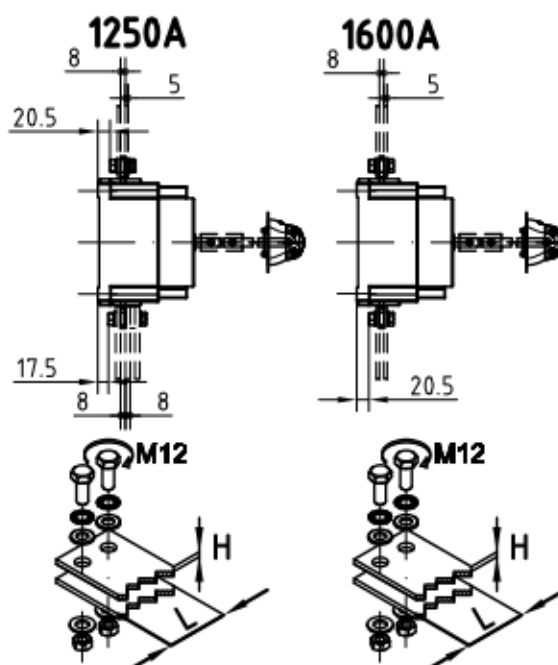

Amp.	S mín. (Cu) mm ²	nº	H max (Cu) mm	L max (Cu) mm		$M' +5\% -10\%$ Nxm
1250 A	800	2	5	80	M12	45
	800	3	8	50		
1600 A	1000	2	5	100		

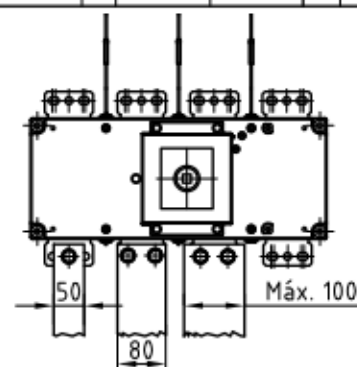

* - H. máx. 10mm y L. máx. 100mm.

SERMES
electric systems

